

DS-QAZ0203G1-S **3 W Ceiling Secondary Speaker**




- Full frequency 5" × 1"
- Rated Power: 3W
- Sensitivity(1 m, 1 W): 93 dB
- Max. SPL: 97 dB
- Frequency Response: 300 Hz to 15 kHz
- Support schedule/live/emergency broadcast; alarm linkage; TTS
- White


▪ Specification

Speaker	
Rated Power	3 W
Impedance	8 Ω
Direction	All directions
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	97 dBSPL
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Coverage Angle	Conical Coverage: 130°
Interface	
Audio In	Fixed resistance input $\times 1$, 8 Ω *The primary speaker(3 W, 8 Ω) can be connected to a maximum of 3 secondary speakers(3 W, 8 Ω).
General	
Operating Temperature	10 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$
Material	Device body: plastic; Mesh cover: metal
Dimension	$\varnothing 179 \text{ mm} \times 77.5 \text{ mm}$ ($\varnothing 7.05'' \times 3.05''$) (Hole Size: 160 mm)
Package Dimension	255 mm $\times$ 243 mm $\times$ 175 mm (10.04" $\times$ 9.57" $\times$ 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Operating Humidity	< 90% (No condensation)
Packing List	Device $\times 1$ Mesh cover $\times 1$ Regulatory Compliance and Safety Information $\times 1$
Mounting Hole Dimension	$\varnothing 160 \text{ mm}$ (6.30")
Mounting Depth	91 mm (3.58")

▪ Wiring

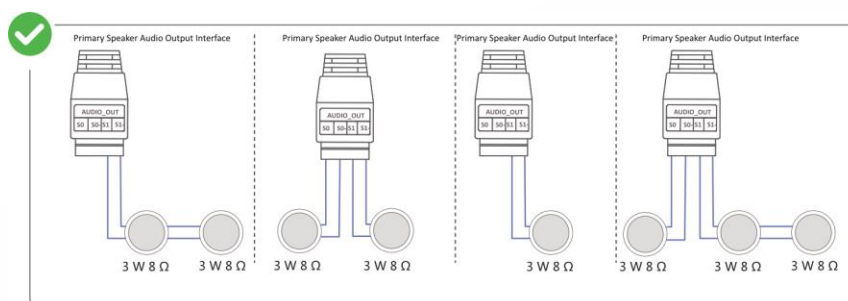

▪ Dimension

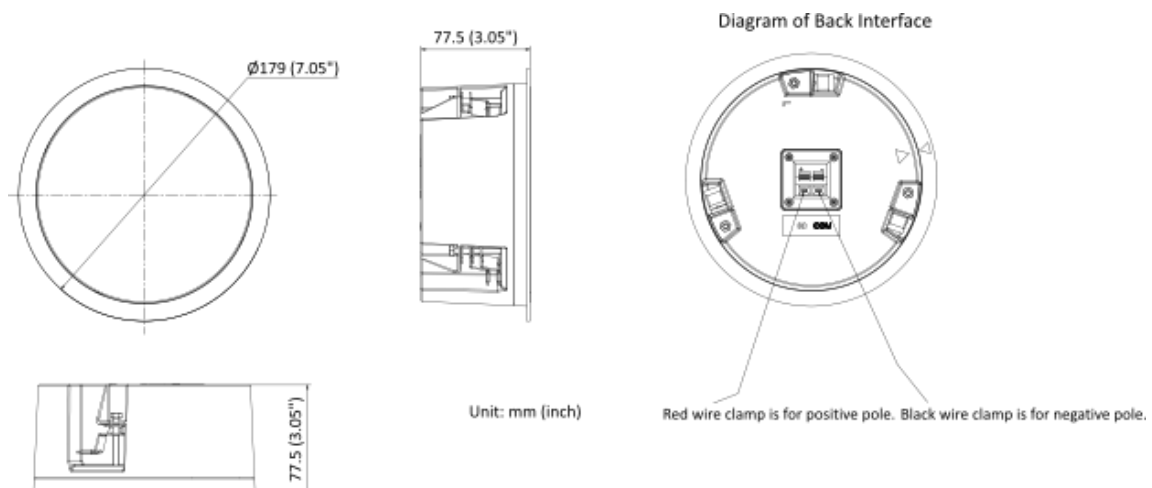

- **Accessory**
- **Optional**

DS-QAZ1203G1-BE



See Far, Go Further



www.hikvision.com
support@hikvision.com

